


# Prep Jet System™

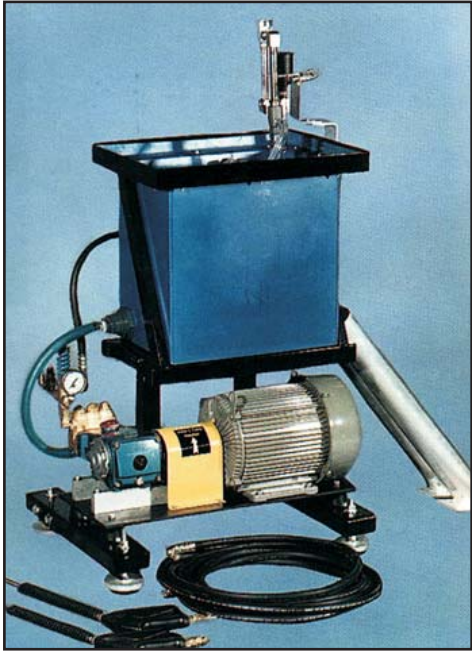

## Prep Jet System™

The dual gun Prep Jet system features a CAT 560 series pump. The CAT pump has long been proven in car wash applications to be a durable, long lasting pump. The pump is well suited for the abusive nature of the tunnel type prep gun application and can handle the demands of the full service car wash. The CAT pump supplies 8 gpm @ 1000 psi, to two prep gun wands. The Prep Jet system utilizes a direct drive pump with an elastomeric type coupler. This coupler drives the pump while acting as a shock absorber between the pump and motor.

The control system for the Prep Jet features a wall mounted on/off switch with a timer that can be set by the operator for 0-5 minutes.

- Heavy duty polyethelene tank resists corrosion
- Heavy duty aluminum gun holsters
- Automatic, times "off" function eliminates pump hammering
- Dual rubber isolation mounts act as shock absorbers
- Frame mounted and pre-plumbed for easy installation



Belanger Incorporated Product Specification Sheet



Belanger, Inc. reserves the right to revise specifications, features or designs, and to change or discontinue models at any time without notice or obligation.

BE 00 26

Copyright 2001  
Belanger, Inc. ©

# Specifications

## Prep Jet System™

### REQUIREMENTS

#### Physical

Tunnel space required	n/a
Unit height	42-3/4" (108.6 cm)
Unit depth	23-1/2" (59.7 cm)
Unit width	29" (73.7 cm)

#### Utility

Electrical	7 1/2 HP 3 phase 208, 230, 460V 120 VAC single phase for control system
------------	--

Hydraulic n/a

Pneumatic n/a

Water ( 1 ) 3/4" (19.05 mm) pipe @  
8 GPM (30.3 LPM) @  
40 PSI (2.8 BAR)

